

Standard and Affordable SIP Phone for Business

With faster response on the phone's user interface and better device performance, the SIP-T27G IP phone, as the upgraded product of T27P, is CoreIP's latest feature-rich tool unifying superior voice capabilities and increased function extension capability for business. CoreIP Optima HD technology and wideband codec of Opus deliver a superb sound quality and bring you a life-like voice communications. With an all-new USB port, the SIP-T27G boasts unparalleled functionality and expansibility with Bluetooth, Wi-Fi and USB recording features. Seamlessly migrated to GigE-based network infrastructure, SIP-T27G IP phone is also built with the Gigabit Ether-net facilitating very rapidly call handling. By using standard encryption protocols, the SIP-T27G performs highly secure remote provisioning and software upgrades.



**Optima
HD Voice**



Opus Codec



Gigabit



USB 2.0



Paperless



Key Features and Benefits

Easy Customization and High Expansibility

With an all-new USB port, the T27G is your ideally powerful and expandable office phone with Wireless, Bluetooth, Wi-Fi and USB recording features. It has three pages of flexible buttons which can be programmed with up to 21 paperless DSS keys.

HD Audio

CoreIP Optima HD Voice technology combines cutting-edge hardware and software with wideband technology for maximum acoustic performance. Being a totally open, highly versatile audio codec, Opus, is designed to perform a higher HD audio quality than other wideband codecs in a high network bandwidth; However, if your current network quality is poor, Opus can provide you with a better audio quality than other narrowband codecs.

Efficient Installation and Provisioning

The CoreIP SIP-T27G supports efficient provisioning and effortless mass deployment with CoreIP's Redirection and Provisioning Service (RPS) and Boot mechanism to help you realize the Zero Touch Provisioning without any complex manual settings, which makes it simple to deploy, easy to maintain and upgrade.

Secure Transport and Interoperability


The SIP-T27G uses SIP over Transport Layer Security (TLS/SSL), which is the latest network security technology. It's also compatible with leading soft switch suppliers CoreIP UCX, 3CX and Broadsoft Broadworks.

Highly secure transport and interoperability

The Communicator uses SIP over Transport Layer Security (TLS/SSL) to provide service providers the latest technology for enhanced network security. The range is certified compatible with CoreIP UCX, 3CX, Asterisk and BroadSoft Broadworks, ensuring excellent compatibility with leading soft switch suppliers

- ❖ **CoreIP Optima HD voice**
- ❖ **3.7" 240x120-pixel graphical LCD with backlight**
- ❖ **Gigabit**
- ❖ **USB 2.0**
- ❖ **Opus* codec support**
- ❖ **Up to 6 SIP accounts**
- ❖ **Paper label free design**
- ❖ **PoE support**
- ❖ **Headset, EHS support**
- ❖ **Supports expansion modules**

- **Audio Features**
- HD voice: HD handset, HD speaker
- Wideband codec: Opus*, G.722
- Narrowband codec: Opus*, G.711(A/μ), G.723.1, G.729, G.729AB, G.726, iLBC
- DTMF: In-band, Out-of-band(RFC 2833) and SIP INFO
- Full-duplex hands-free speakerphone with AEC
- VAD, CNG, AEC, PLC, AJB, AGC
- **Phone Features**
- 6 VoIP accounts
- One-touch speed dial, redial
- Call forward, call waiting
- Call transfer, call hold
- Call return, group listening
- Mute, auto answer, DND
- 3-way conference call
- Direct IP call without SIP proxy
- Ring tone selection/import/delete
- Hotline, emergency call
- Set date time manually or automatically
- Dial plan, XML Browser, Action URL/URI
- Integrated Screenshots
- RTCP-XR
- USB port (2.0 compliant)
USB call recording through USB flash drive
- Enhanced DSS key
- **Directory**
- Local phonebook up to 1000 entries
- Black list
- XML/LDAP remote phonebook
- Intelligent search method
- Phonebook search/import/export
- Call history: dialed/received/missed/forwarded
- **IP-PBX Features**
- Busy Lamp Field (BLF)
- Bridged Line Appearance (BLA)
- Anonymous call, anonymous call rejection
- Hot-desking, voice mail
- Flexible seating
- Call park, call pickup
- Executive and Assistant
- Centralized call recording
- Visual voice mail
- **Display and Indicator**
- 3.7" 240x120-pixel graphical LCD with backlight
- LED for call and message waiting indication
- Dual-color (red or green) illuminated LEDs for line status information
- Intuitive user interface with icons and soft keys
- Multilingual user interface
- Caller ID with name and number
- Power saving
- **Feature keys**
- 8 line keys with LED
- 8 line keys can be programmed up to 21 paperless DSS keys (3-page view)
- 8 features keys: message, headset, conference, mute, hold, transfer, redial, hands-free speakerphone
- 4 context-sensitive "soft" keys
- 6 navigation keys
- 2 volume control keys
- Illuminated message key
- Illuminated headset key
- **Interface**
- Dual-port Gigabit Ethernet
- Power over Ethernet (IEEE 802.3af), Class 3
- 1 x USB port (2.0 compliant)
- 1 x RJ9 (4P4C) handset port
- 1 x RJ9 (4P4C) headset port
- 1 x RJ12 (6P6C) EHS port
- 1 x RJ12 (6P6C) EXT port:
Supports up to 6 Expansion Modules
- **Other Physical Features**
- Stand with 2 adjustable angles
- Wall mountable
- External AC adapter (optional) : AC 100~240V input and DC 5V/1.2A output
- Power consumption (PSU): 1.4-3.0W
- Power consumption (PoE): 1.7-7.0W
- Dimension (W*D*H*T):
265mm x 210mm x 170.5mm x 53.5mm
- Operating humidity: 10-95%
- Operating temperature: -10~50°C (+14~122°F)
- **Management**
- Configuration: browser/phone/auto-provision
- Auto provision via
FTP/TFTP/HTTP/HTTPS for mass deploy
- Auto-provision with PnP
- Zero-sp-touch, TR-069
- Phone lock for personal privacy protection
- Reset to factory, reboot
- Package tracing export, system log
- **Network and Security**
- SIP v1 (RFC2543), v2 (RFC3261)
- Call server redundancy supported
- NAT traversal: STUN mode
- Proxy mode and peer-to-peer SIP link mode
- IP assignment: static/DHCP
- HTTP/HTTPS web server
- Time and date synchronization using NTP
- UDP/TCP/DNS-SRV(RFC 3263)
- QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP
- SRTP for voice
- Transport Layer Security (TLS)
- HTTPS certificate manager
- AES encryption for configuration file
- Digest authentication using MD5/MD5-session
- OpenVPN, IEEE802.1X
- IPv6
- LLDP/CDP/DHCP VLAN
- ICE
- **Package Features**
- Package content:
- CoreIP SIP-T27G IP phone
- Handset with handset cord
- Ethernet Cable (1.5m CAT5E UTP Cable)
- Stand
- Quick Start Guide
- Power Adapter (Optional)
- Wall Mount Bracket (Optional)
- Qty/CTN: 5 PCS
- N.W/CTN: 6.6 kg
- G.W/CTN: 7.4 kg
- Giftbox size: 295mm x 224mm x 115mm

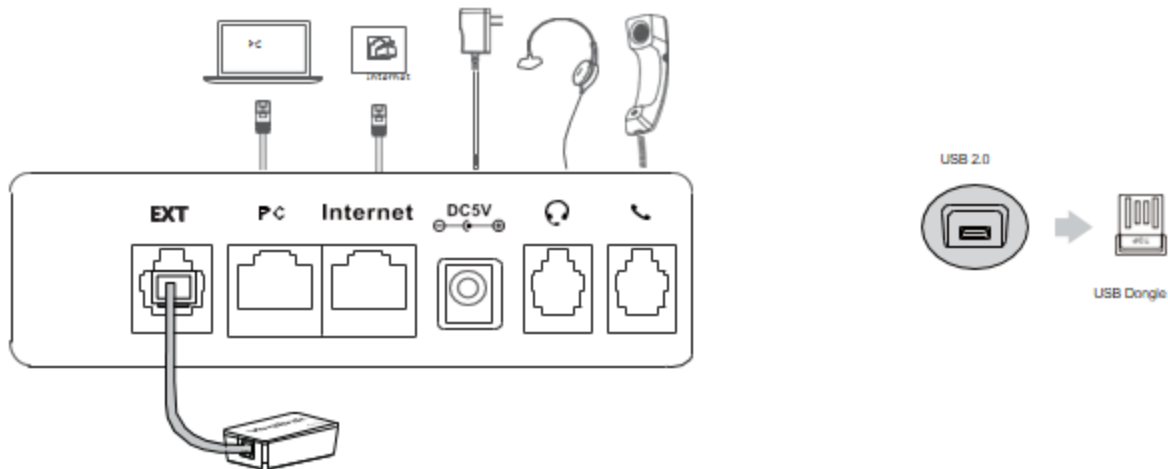

About CoreIP

To introduce ourselves we would like to call us a Technology company. A company that helps global organizations implement optimized/customised Telecom/IT solutions with simplicity, which is an absolute must for any organization for its successful growth. Our scope of expertise includes Unified Communications, Security solutions, Networking solutions and a lot Core IP's vision of the digital future is driven by the needs and aspirations of our customers and consumers around the country who are in need of latest technology every day. We share their dream to live a fuller life by providing ways of working smarter and enjoying the rewards of technological advanced solutions. As we move forward together with our customers into the uncharted future of the 21st century with the prospect of future technologies and systems yet to be thought of, Core IP's standards are still firmly grounded in the philosophy of company's directors. CoreIP promises to deliver best-in-class products and services, enhanced by extensive in house research and development capabilities.

Fore More Information

Email: info@coreip.co.in

Web: www.coreip.co.in

[0120-6618000](tel:0120-6618000)

CoreIP Technology Pvt. Ltd.

Add: Block C-421, The i-thum , A-40, Sector- 62,
Noida, UP, 201309

Email: info@coreip.co.in

Web: www.coreip.co.in